

## Technical Data Sheet

Farapol Jam Chemical Indus. Co.

### FARAPOL O 134

**Product Description** Farapol O 134 is an Orthophthalic-based unsaturated polyester resin dissolved in styrene, non-accelerated and non-thixotropic. It has a medium viscosity, medium reactive, good impregnation to glass fiber, good process abilities, mechanical performance combining, elongation at break in tension and a suitable HDT.

**Applications and Use** This resin is designed for fabrication using filament winding, hand lay-up, spray-up and molded grating applications process. Manufacturing GRP tanks and pipes is one of the important uses of this resin.

**Certificates and Approvals** Farapol O 134 is manufactured from raw materials listed in FDA regulation Title 21 CFR 177.2420. Farapol Jam Chemical Industrial Company carries out this resin's production, quality control, and distribution in compliance with ISO 9001, 14001, 45001, 10002, 10004, 10015, and 17065 standards.

#### Typical Liquid Resin Properties


<i>Property @ 25 °C</i>	<i>Unit</i>	<i>Specification</i>	<i>Method</i>
Viscosity Brookfield <sup>1</sup>	cps	300 - 400	ISO 2555
Acid Value	mgKOH/g	Max 30	ASTM D 1639
Solid Content	%	58 - 62	ISO 3251
Color	Gardner	Max 2	ASTM D 1544
Specific Gravity	relative	1.11-1.13	ISO 2811
Gel Time <sup>1</sup>	minute	16 - 22	ASTM D 2471
Exothermic Peak Temperature	°C	150-180	ASTM D 2471

1) Gel Time and Viscosity can be adjusted as per customer requirements.

#### Gel Time Behavior of Resin<sup>2</sup>

<i>Temperature (°C)</i>	<i>18</i>	<i>25</i>	<i>30</i>
<i>Gel Time (minute)</i>	27-30	16-22	11-13

2) Gel time measuring formulation used: (Cobalt Octoate Farapol C 901 1%- 1.0 phr, Akperox A60 1.0 phr).

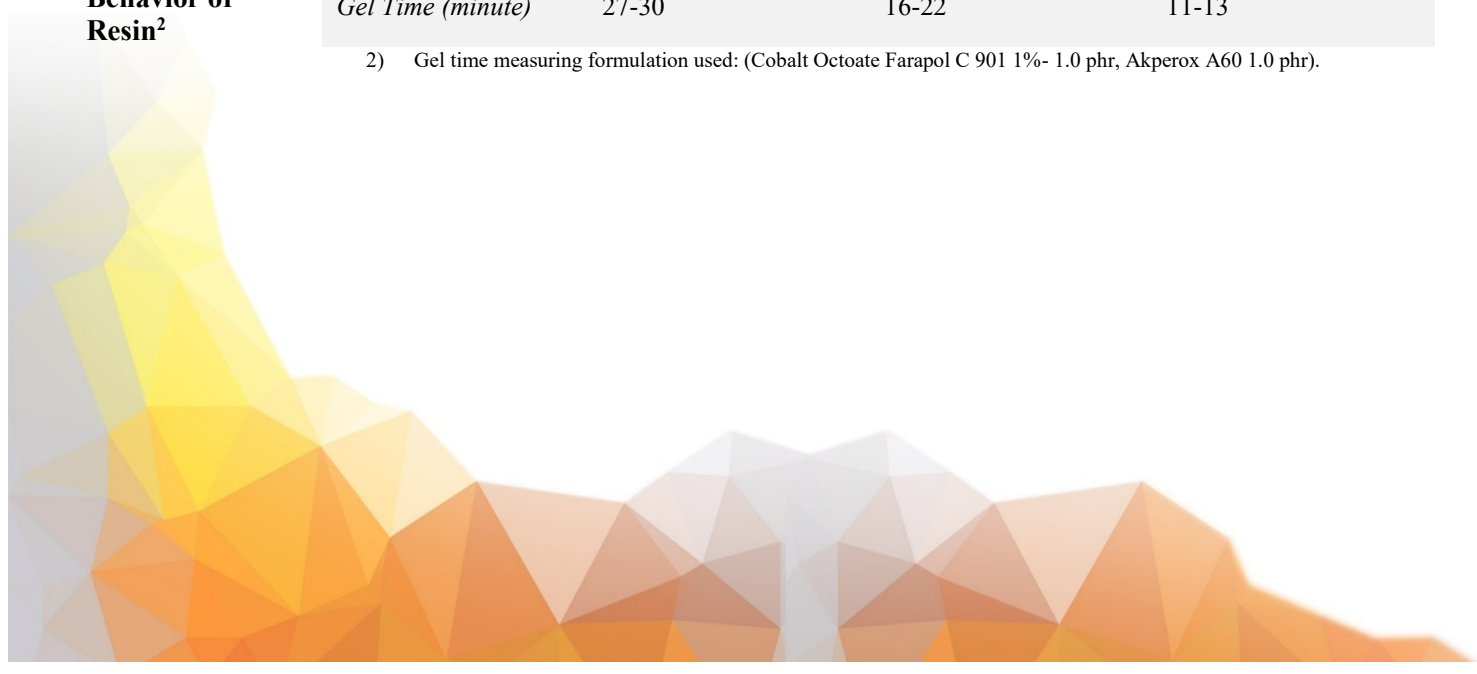

**Typical Casted Resin Properties<sup>3</sup>**

<i>Property</i>	<i>Unit</i>	<i>Specification</i>	<i>Method</i>
Tensile Strength	MPa	Min 75	ISO 3268, ASTM D638, ISO 527-2&4
Elongation at Break	%	Min 4.0	ISO 3268, ASTM D638, ISO 527-2&4
Tensile Modulus	GPa	Min 3.2	ISO 3268, ASTM D638, ISO 527-2&4
Flexural Strength	MPa	Min 120	ISO 178/ASTM D 790
Flexural Modulus	GPa	Min 3.5	ISO 178/ASTM D 790
Heat Distortion Temperature	°C	Min 75	ISO 75
Barcol Hardness	Barcol	Min 40	ASTM D 2583
Water Absorption	%	≈ 0.30	ISO 62- Test Method 3
Linear Shrinkage <sup>4</sup>	%	≈ 1.8	Internal method

- 3) Materials used for curing are: (Cobalt Octoate Farapol C 901 1%- 1.0 phr, Akperox A60 1.0 phr). Curing Time is 24 hrs at Room Temperature and 3 hrs at 80 °C.  
 4) This test is done on the linear sample with dimensions (1 cm × 1 cm × 100 cm).

**Handling, Storage and Stability**

FARAPOL O 134 is a product sensitive to temperature, Light, and oxidation. Hence, it should be stored indoors in a dry place at a temperature between 5 and 25°C. Keep always in the original, unopened, and undamaged containers. Avoid keeping material exposed to sunlight. On storage under the above-mentioned conditions, the shelf life for FARAPOL O 134 is 6 months.

**Healthy and Safety**

Avoid storing the resin along with Metallic Driers and Peroxides in the same area. Safety Datasheets of the product are available on demand. The user is responsible to familiar with the material handling and safety datasheet before using the product.

**Packaging**

FARAPOL O 134 is supplied in 200 Kg steel barrels, IBC tanks and bulk road tankers.

**Notice**

The information contained herein is provided in good faith and is to the best of our knowledge accurate, but we assume no liability for its accuracy or completeness. Therefore, the buyer is advised to determine the suitability of this product for the intended use. We retain the right to make any changes according to technological progress or further developments.

**Document Registration**

Pub. No: POL- F-76-33

Revision No.: 3

Rev. Date: 11/30/2023

**Contact Information**

Tel: +98 21 26231019

Fax: +98 21 26231014

Site: [www.farapol.com](http://www.farapol.com)

Email: [info@farapol.com](mailto:info@farapol.com)

