

# Technical Data Sheet

Farapol Jam Chemical Indus. Co.

## FARAPOL V 301

**Product Description** Farapol V 301 Bis-phenol A based Epoxy Vinyl Ester Resin designed to provide exceptional mechanical properties at higher temperatures. This resin offers a high resistance to solvents and chemicals, good retention of strength and toughness at elevated temperatures, and excellent resistance to acidic oxidizing environments.

**Applications and Use** This resin is designed for the Manufacturing of tanks, containers and pipes. Farapol V 301 can be used in composite production processes including filament winding, pultrusion, hand lay-up and spray-up processes where outstanding mechanical properties and excellent resistance to chemicals and heat are required.

**Certificates and Approvals** Farapol Jam Chemical Industrial Company carries out the production, quality control, and distribution of this resin in compliance with ISO 9001, 14001, 45001, 10002, 10004, 10015, and 17065 standards. If the resin is properly formulated and cured, it can meet US FDA regulations 21 CFR 177.2420.

### Typical Liquid Resin Properties


<i>Property @ 25 °C</i>	<i>Unit</i>	<i>Specification</i>	<i>Method</i>
Viscosity Brookfield <sup>1</sup>	cps	400 - 500	ISO 2555
Acid Value	mgKOH/g	Max 30	ASTM D 1639
Solid Content	%	52 - 57	ISO 3251
Color	Gardner	Max 2	ASTM D 1544
Specific Gravity	relative	1.105-1.110	ISO 2811
Gel Time <sup>1</sup>	minute	20 - 22	ASTM D 2471
Exothermic Peak Temperature	°C	150-180	ASTM D 2471

1) Gel Time and Viscosity can be adjusted as per customer requirements.

### Gel Time Behavior of Resin<sup>2</sup>

<i>Temperature (°C)</i>	<i>18</i>	<i>25</i>	<i>30</i>
<i>Gel Time (minute)</i>	27-30	20-22	15-17

2) Gel time measuring formulation used: 1.0 phr Cobalt (1.0%) , 0.5 phr DMA (10%) - Catalyst: 1.0 phr Akperox (A60)

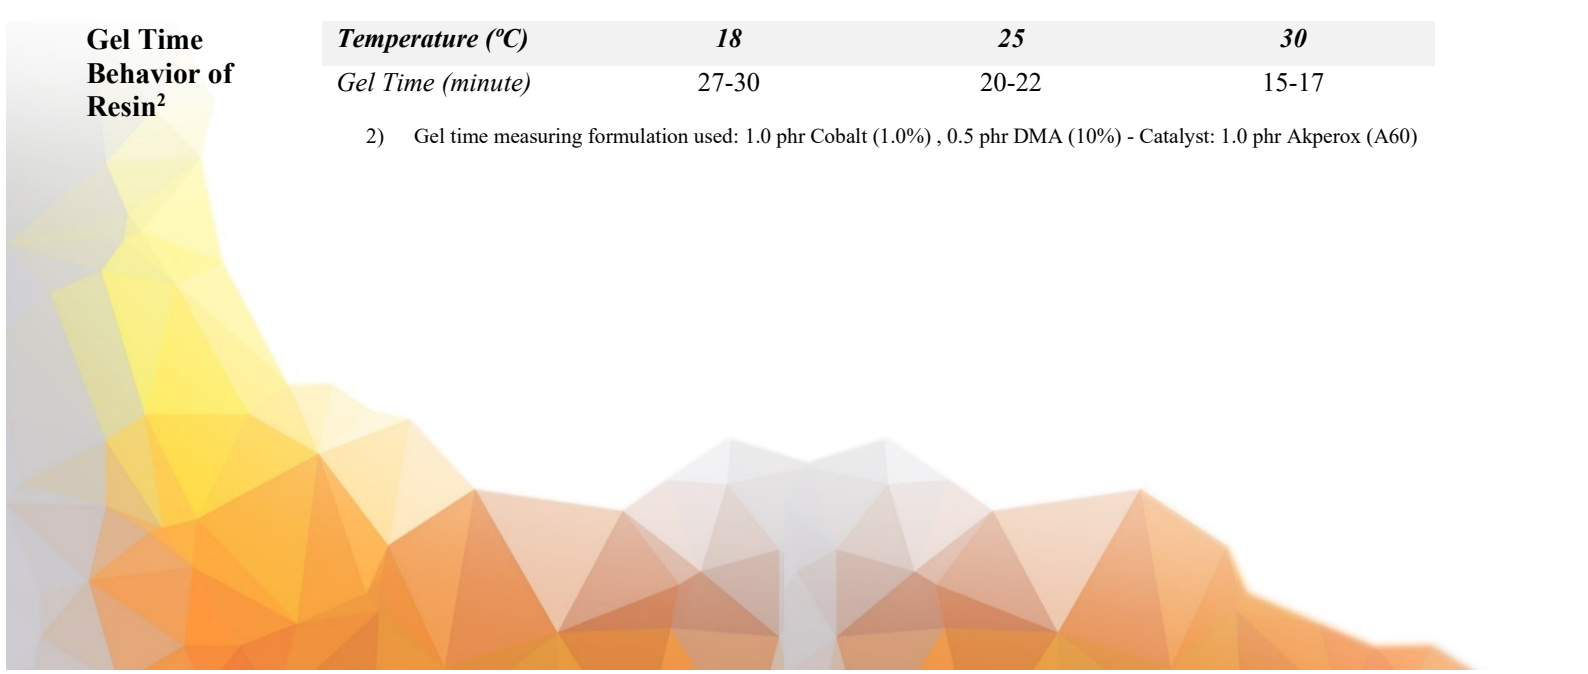

### Typical Casted Resin Properties<sup>3</sup>

<i>Property</i>	<i>Unit</i>	<i>Specification</i>	<i>Method</i>
Tensile Strength	MPa	Min 80	ISO 3268, ASTM D638, ISO 527-2&4
Elongation at Break	%	Min 3.5	ISO 3268, ASTM D638, ISO 527-2&4
Tensile Modulus	GPa	Min 3.0	ISO 3268, ASTM D638, ISO 527-2&4
Flexural Strength	MPa	Min 120	ISO 178/ASTM D 790
Flexural Modulus	GPa	Min 3.5	ISO 178/ASTM D 790
Glass Transition Temperature (tg)	°C	124.1	ASTM E 1640
Heat Distortion Temperature	°C	Min 105	ISO 75
Barcol Hardness	Barcol	Min 40	ASTM D 2583
Water Absorption	%	Max 0.25	ISO 62- Test Method 3
Linear Shrinkage <sup>4</sup>	%	Max 1.5	Internal method

3) 1.0 phr Cobalt (1.0%) & 0.5 phr DMA (10%) - Catalyst: 1.0 phr Akperox (A60). Curing Time is 24 hrs at Room Temperature 2 hrs at 80°C & 1 hr at 120°C.

4) This test is done on the linear sample with dimensions (1 cm × 1 cm × 100 cm).

### Handling, Storage and Stability

FARAPOL V 301 is a product sensitive to temperature, Light, and oxidation. Hence, it should be stored indoors in a dry place at a temperature between 5 and 25°C. Keep always in the original, unopened, and undamaged containers. Avoid keeping material exposed to sunlight. On storage under the conditions mentioned above, the shelf life for FARAPOL V 301 is 6 months.

### Healthy and Safety

Avoid storing the resin along with Metallic Driers and Peroxides in the same area. Safety Datasheets of the product are available on demand. The user is responsible to familiar with the material handling and safety datasheet before using the product.

### Packaging

FARAPOL V 301 is supplied in 200 Kg steel barrels, IBC tanks and bulk road tankers.

### Notice

The information contained herein is provided in good faith and is to the best of our knowledge accurate, but we assume no liability for its accuracy or completeness. Therefore, the buyer is advised to determine the suitability of this product for the intended use. We retain the right to make any changes according to technological progress or further developments.

### Document Registration

Pub. No: POL- F-76-33

Revision No.: 3

Rev. Date: 11/29/2023

### Contact Information

Tel: +98 21 26231019

Fax: +98 21 26231014

Site: [www.farapol.com](http://www.farapol.com)

Email: [info@farapol.com](mailto:info@farapol.com)

